
HISENS

HSMRO2 SPOTLIGHT

Downlight&Spotlight

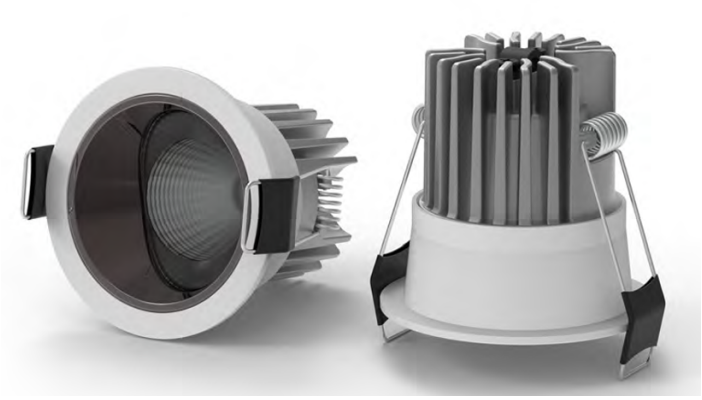

SPECIFICATIONS

Wattage (N2): 5W / 7W / 12W / 20W	Input Voltage: 220V
Frequency: 50/60Hz	Dia(mm) (N2): 50mm / 65mm / 85mm / 105mm
Cut Out(mm)(N2): 40mm / 55mm / 75mm / 95mm	Beam Angle (N2): 15/24/38deg
Height(mm)(N2): 50mm / 65mm / 76mm / 108mm	CCT: 3000/4000/6500K
IP Rating: IP20	Lumen: 450lm / 500lm / 840lm / 1400lm
Body Color: White/Black/Gold/Silver	Lead Time: 1 week
Color Rendering Index: 80Ra	Warranty: 3years/5 years
Lifetime: 30000/50000hours	Body Material: Aluminium